



## Specifications

Brand Name:Happymodel
Item Name: Larva X 2-3S 2.5inch Brushless FPV drone
Wheelbase: 100mm
Size: 88mm*88mm*45mm(without propellers)
Weight: 50g(without battery)
Recommended Battery:
3S 300mah/350mah 2S 450mah

## Package includes


Item Name	Qty
Larva X frame	1
Option1: Crazybee F4FR V3.0 PRO FC built-in Frsky NON-EU RX	1
Option2: Crazybee F4FS V3.0 PRO FC built-in Flysky RX	
Option3: Crazybee F4 V3.0 PRO FC with external DSM2/DSMX RX	
Option4: Crazybee F4 V3.0 PRO FC with external Frsky RXSR receiver	
Option5: Crazybee F4 V3.0 PRO FC with external TBS Crossfire Nano RX	
1103 KV7000 motor	4
2.5inch tri-blades propeller (4cw+4ccw)	1
Camera : Runcam Nano2	1
VTX: 5.8g 25mw~200mw switchable with 720p DVR (Diamond_vtx)	1
Propeller disassemble tool	1
Screwdriver	1

## Flight controller connection diagram

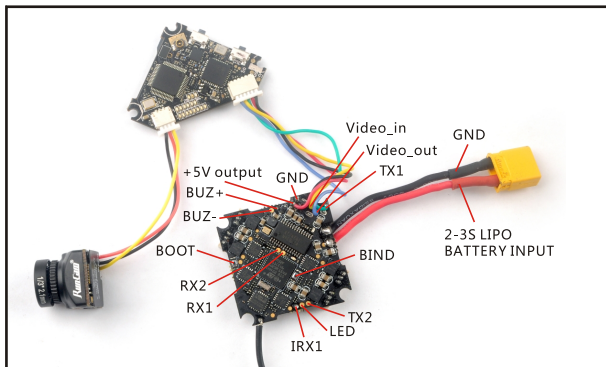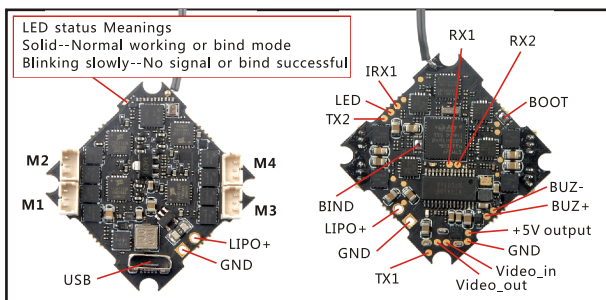


## Binding procedure

1.Powering the Larva X then the red LED at the bottom of the flight controller will blinking slowly. And then press and hold the bind button for 2 seconds , the red led will getting to be solid , this indicate the receiver is in bind mode.

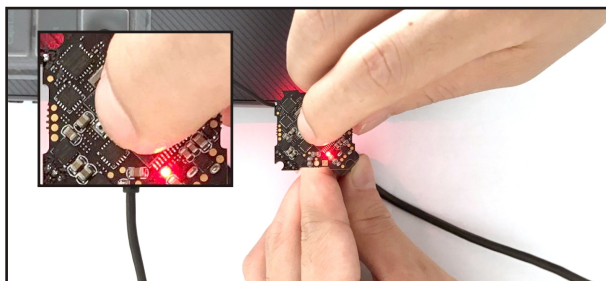

Another simple way to bind with the Frsky transmitter is : Plug the usb and go to the CLI command tab in the betafight configurator, then type "bind\_rx\_spi", the receiver will getting into bind mode , and then make your Frsky transmitter to bind mode.




2.Turn on your Frsky Taranis transmitter, and move to BIND OPTION from SETUP MENU, Choose receiver mode D16 or D8 according to your Betaflight receiver configuration (Frsky\_X = D16 mode, Frsky\_D=D8 mode)we recommend use D8 mode



3.ENT [Bind] to binding with the Larva X ,the red LED at the bottom of the flight controller will blinking slowly on the flight controller ,this indicate binding successfully, and then exist binding mode of your Frsky transmitter, the red LED at the bottom of the flight controller will getting to be solid again, this indicate working normal.


## Receiver configuration

Please set Receiver mode to be SPI RX Support from the Configuration tab of the Betaflight Configurator, then select FRSKY\_X Provider for FRSKY D16 MODE or Select FRSKY\_D Provider for FRSKY D8 MODE, don't enable Serial RX since the CRAZYBEE Flight controller is integrated SPI BUS Receiver

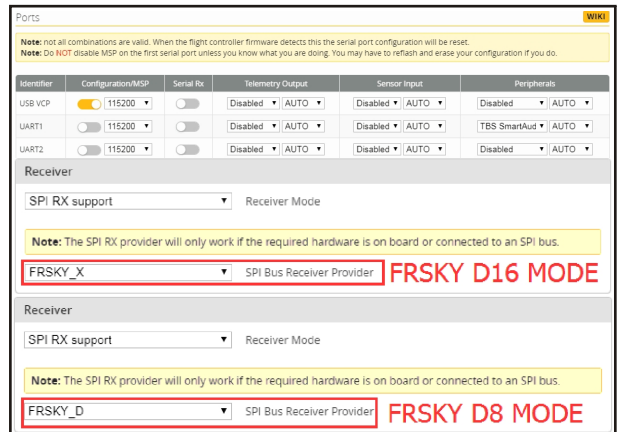

## Arm/Disarm the Motor

1. The Default Arm/Disarm switch for Larva X is AUX1(Channel 5),and you can also customize it with Betaflight Configurator.

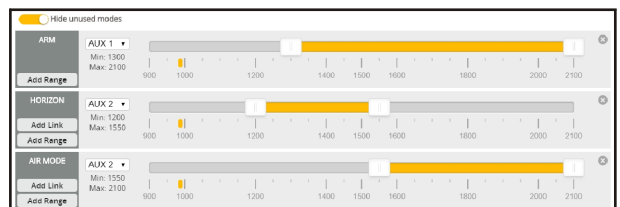

2.Turn on the Frsky transmitter (Use X9D+ as an example) and move to the MIXER interface, Set "SA" or "SB" switch etc. for Ch5 to ARM/DISARM the motor.




3.The default channel map for Larva X Frsky version is TAER1234, please make sure your transmitter is matched, otherwise it will can't be armed. Toggle the AUX1 Switch, the Green LED on the flight controller will getting to be solid, this indicates the motor was armed . And also you can found "Armed" displayed on your FPV Goggles or the FPV Monitor. Please make sure keep the Larva X level before arming .Be careful and enjoy your flight now !



Toggle the AUX1 Switch, the Green LED on the Flight controller will getting to be solid

## VTX Bands and Channels setup

Blue LED5 and Green LED8 light on, indicating frequency 5917MHZ ( BAND5 and CH8)  
Blue LED1 and Green LED2 light on, indicating frequency 5845MHZ (BAND1 and CH2)

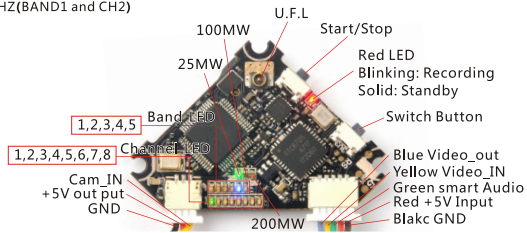

### Frequency and channel frequency table:

FR	CH	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band1(A)	5865M	5845M	5825M	5805M	5785M	5765M	5745M	5725M	
Band2(B)	5733M	5752M	5771M	5790M	5809M	5828M	5847M	5866M	
Band3(E)	5705M	5685M	5665M	5645M	5625M	5605M	5585M	5565M	
Band4(F)	5740M	5760M	5780M	5800M	5820M	5840M	5860M	5880M	
Band5(R)	5658M	5695M	5732M	5769M	5806M	5843M	5880M	5917M	

The DVR will recording automatically when power on.

Press the start/stop to start or stop recording.

### VTX power set

Go to Betaflight configurator CLI tab, type "set vtx\_power=1" to choose 25mw, "set vtx\_power=2" to choose 100mw, "set vtx\_power=3" to choose 200mw, need to type "save"

### \*NOTES:

Default VTX setting is 200mw but the VTX power LED indicate will always show 25mw when the quad was disarmed, because we have "set VTX\_low\_power\_disarm=on"

### There are 3 ways to switch the vtx channels:

1.Short press the switch button to choose the VTX channel, Press and hold the button for 2 seconds and release to choose the VTX band (Can't save, it will lost the channel while power off)

2.If we need to use Channel 5705 then we should Go to Betaflight CLI, type the command:

Set VTX\_band=3

Set VTX\_channel=1

save

3.Enable Smaraudio for UART1, then move the stick of the transmitter (THR MID + YAW LEFT

+ PITCH UP) to enter OSD Menu, Enter to Features, then enter to VTX SA to set VTX Band and channel

Identifier	Configuration	MSP	Serial bit	Telemetry Output	Sensor Input	Peripherals
USB VCP	115200	Disabled	AUTO	Disabled	AUTO	Disabled
UART1	115200	Disabled	AUTO	Disabled	AUTO	TBS SmartAud
UART2	115200	Disabled	AUTO	Disabled	AUTO	Disabled





## DVR firmware update

Step 1. Download the latest firmware from www.happymodel.cn, extract the CRESFW.BIN to an empty TF-SD card

Step 2. Put the TF-SD card into Diamond VTX, and power on for it, the red LED will start flashing. Then waiting to the red LED turn off, this indicates firmware upgrading successfully.  
Step 3. Important!!! You must power off, the Diamond VTX immediately once the red LED turn off. Don't turn off the power during firmware upgrading. And remember to remove the CRESFW.BIN firmware from TF-SD card after upgrading.

## Mixer type and ESC/motor protocol

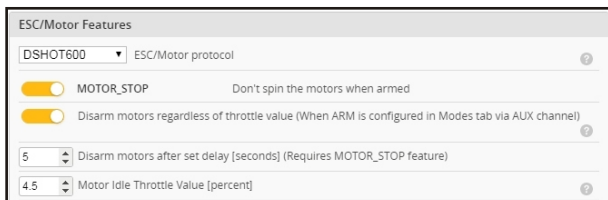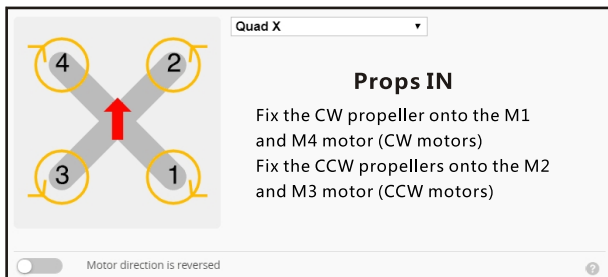

## Default PID setting

	Proport...	Integral	Derivative	Feedfor...	RC Rate	Super Rate	Max Vel [deg/s]	RC Expo
Basic/Acro								
ROLL	40	50	32	60	1.00	0.75	800	0.10
PITCH	42	50	37	60	1.00	0.75	800	0.10
YAW	65	55	0	100	1.00	0.70	667	0.10

## ESC Check and Flash firmware


1. Download New release BLHeliSuite from:

<https://www.mediafire.com/folder/dx6kfaasyo241/BLHeliSuite>


2. Plug the usb and connect the flight controller to computer



3. Open the Device Manager of your computer, find the Ports, please make sure the Com port Serial Number is under 255, otherwise it will can't connect to the BLHELISUITE. You can change the port serial number like the following step:

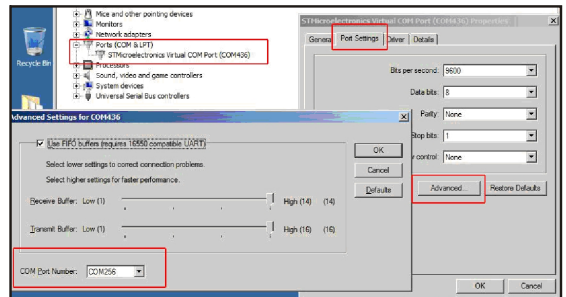

4. Open the BLHELISUITE, Select SILABS BLHeli Bootloader (Cleanflight) from the third tab on the top side. Then Select the right Serial com port and Click connect. You can also Flash the new release BLHeli\_s firmware via the BLHELISUITE, the firmware Target is "F-H-40"

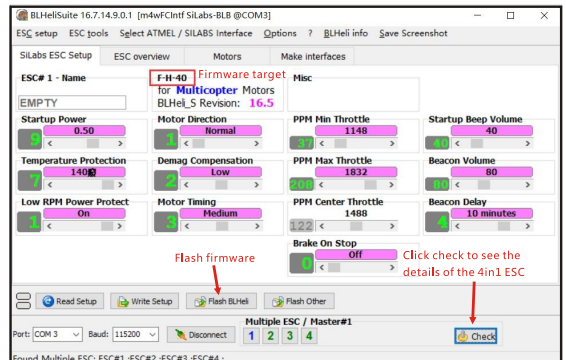

## Flight controller firmware update

1. Install latest STM32 Virtual COM Port Driver

<http://www.st.com/web/en/catalog/tools/PE257938>


2. Install STM BOOTLOADER Driver (STM Device in DFU MODE)

3. Open Betaflight configurator and choose firmware target "Crazybee F4 FR", then select the firmware version.

4. There are 2 ways to get in DFU Mode: 1). solder the boot pad and then plug USB to computer 2). loading betafight firmware and hit "flash", then it will getting into DFU Mode automatically.

5. Open Zadig tools to replace the drivers from STM32 Bootloader to WINUSB Driver.

6. Reconnect the flight controller to the computer after replace driver done, and open Betaflight Configurator, loading firmware and flash.

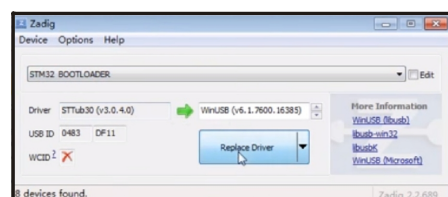

## Notes:

1. Add external Sbus RX, Disable SPI RX---Connect SBUS wire to the IRX1 pad ---Enable Serial RX for UART1---Choose serial\_based receiver and Sbus protocol

2. Add external Crossfire rx, use Tx2 RX2 port