



Specifications

Brand Name:Happymodel
Item Name: Larva X 2-3S 2.5inch Brushless FPV drone
Wheelbase: 100mm
Size: 88mm*88mm*45mm(without propellers)
Weight: 50g(without battery)
Recommended Battery:
3S 300mah/350mah 2S 450mah

Package includes

Item Name	Qty
Larva X frame	1
Option1: Crazybee F4FR V3.0 PRO FC built-in Frsky NON-EU RX	1
Option2: Crazybee F4FS V3.0 PRO FC built-in Flysky RX	
Option3: Crazybee F4 V3.0 PRO FC with external DSM2/DSMX RX	
Option4: Crazybee F4 V3.0 PRO FC with external Frsky RXSR receiver	
Option5: Crazybee F4 V3.0 PRO FC with external TBS Crossfire Nano RX	
1103 KV7000 motor	4
2.5inch tri-blades propeller (4cw+4ccw)	1
Camera : Runcam Nano2	1
VTX: 5.8g 25mw~200mw switchable with 720p DVR (Diamond_vtx)	1
Propeller disassemble tool	1
Screwdriver	1

Flight controller connection diagram

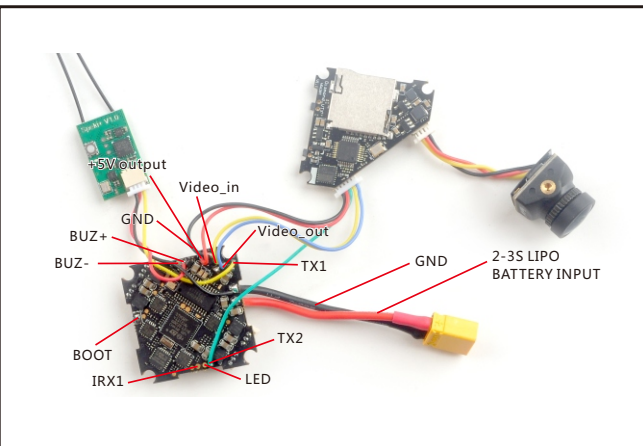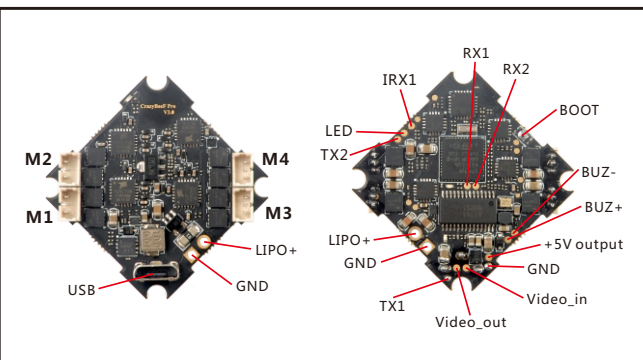

Binding procedure

Press and hold the bind button of the Speki+ receiver, then plug the USB. The red led on the speki+ receiver would blinking fast, this indicate the receiver is in bind mode .



Make your Spektrum radio transmitter or multi protocol radio transmitter to bind with the receiver , if the red LED on the speki+ receiver getting to be solid , this indicate the binding successfully. If bind failed you need to repeat the above steps.

Receiver configuration

We have configured the receiver for the Larva-X before shipping out . If you flashed the betafight firmware , please setup as the following steps: Enable Serial_RX for UART1 , then select RX_Serial from the Receiver mode and set the serial receiver provider to be SPEKTRUM 2048/SRXL. This receiver mode support both Spektrum dsm2/dsmx radio . And you need to enable Telemetry too ,otherwise the receiver will not working .

Receiver

Serial-based receiver (SPEKSAT, S)
Receiver Mode

Note: Remember to configure a Serial Port (via Ports tab) and choose a Serial Receiver Provider when using RX_SERIAL feature.

SPEKTRUM2048/SRXL
Serial Receiver Provider

Other Features

Note: Not all features are supported by all flight controllers. If you enable a specific feature, and it is disabled after you hit 'Save and Reboot', it means that this feature is not supported on your board.

INFLIGHT_ACC_CAL

In-flight level calibration

SERVO_TILT

Servo gimbal

SOFTSERIAL

Enable CPU based serial ports

SONAR

Sonar

TELEMETRY

Telemetry output

Arm/Disarm the Motor

1. The Default Arm/Disarm switch for Larva X is AUX1(Channel 5),and you can also customize it with Betaflight Configurator.

Modes

Use ranges to define the switches on your transmitter and corresponding mode assignments. A receiver channel that gives a reading between a range min/max will activate the mode. Remember to save your settings using the Save button.

ARM

AUX 1

Min: 1400
Max: 2100

AIR MODE

Add Range

ANGLE

AUX 2

Min: 1200
Max: 2100

Add Range

2.For most of Spektrum radio the default channel 5 is Gear switch and you can also customize it. Use DX9 for example, Go to menu and select System setup ,then choose Channel ssign.



3.The default channel map for Larva X DSM2/X version is TAER1234, please make sure your transmitter is matched, otherwise it will can't be armed. Toggle the AUX1 Switch, the Green LED on the flight controller will getting to be solid, this indicates the motor was armed . And also you can found "Armed" displayed on your FPV Goggles or the FPV Monitor. Please make sure keep the Larva X level before arming .Be careful and enjoy your flight now !



VTX Bands and Channels setup

Blue LED5 and Green LED8 light on, indicating frequency 5917MHZ (BAND5 and CH8)
Blue LED1 and Green LED2 light on, indicating frequency 5845MHZ (BAND1 and CH2)

Frequency and channel frequency table:

FR	CH	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band1(A)	5865M	5845M	5825M	5805M	5785M	5765M	5745M	5725M	
Band2(B)	5733M	5752M	5771M	5790M	5809M	5828M	5847M	5866M	
Band3(E)	5705M	5685M	5665M	5645M	5625M	5605M	5585M	5565M	
Band4(F)	5740M	5760M	5780M	5800M	5820M	5840M	5860M	5880M	
Band5(R)	5658M	5695M	5732M	5769M	5806M	5843M	5880M	5917M	

The DVR will recording automatically when power on.
Press the start/stop to start or stop recording.

VTX power set

Go to Betaflight configurator CLI tab, type "set vtx_power=1" to choose 25mw, "set vtx_power=2" to choose 100mw, "set vtx_power=3" to choose 200mw, need to type "save"

*NOTES:

Default VTX setting is 200mw but the VTX power LED indicate will always show 25mw when the quad was disarmed, because we have "set VTX_low_power_disarm=on"

There are 3 ways to switch the vtx channels:

- Short press the switch button to choose the VTX channel, Press and hold the button for 2 seconds and release to choose the VTX band (Can't save, it will lost the channel while power off)
- If we need to use Channel 5705 then we should Go to Betaflight CLI, type the command:
Set VTX_band=3
Set VTX_channel=1
save
- Enable Smaraudio for UART2, then move the stick of the transmitter (THR MID + YAW LEFT + PITCH UP) to enter OSD Menu, then enter to VTX SA to set VTX Band and channel

Parameter	Configuration	Serial Bt	Telemetry Output	Sensor Input	Peripheral
USB VCP	115200	115200	Disabled	Disabled	Disabled
UART1	115200	115200	Disabled	Disabled	Disabled
UART2	115200	115200	Disabled	Disabled	VTX (TBS SMC) / AUTO



DVR firmware update

- Step 1, Download the latest firmware from www.happymodel.cn, extract the CRESFW.BIN to an empty TF-SD card
- Step 2, Put the TF-SD card into Diamond VTX, and power on for it, the red LED will start to flashing, then waiting to the red LED turn off, this indicates firmware upgrading successfully
- Step 3, Important!!! You must power off the Diamond VTX immediately once the red LED turn off. Don't turn off the power during firmware upgrading, and remember to remove the CRESFW.BIN firmware from TF-SD card after upgrading.

Mixer type and ESC/motor protocol

Props IN

Fix the CW propeller onto the M1 and M4 motor (CW motors)
Fix the CCW propellers onto the M2 and M3 motor (CCW motors)

☐ Motor direction is reversed

ESC/Motor Features

DSHOT600 ESC/Motor protocol

☒ MOTOR_STOP Don't spin the motors when armed

☒ Disarm motors regardless of throttle value (When ARM is configured in Modes tab via AUX channel)

5 Disarm motors after set delay [seconds] (Requires MOTOR_STOP feature)

4.5 Motor Idle Throttle Value [percent]

Default PID setting


	Proport...	Integral	Derivative	Feedfor...	RC Rate	Super Rate	Max Vel [deg/s]	RC Expo
Basic/Acro								
ROLL	40	50	32	60	1.00	0.75	800	0.10
PITCH	42	50	37	60	1.00	0.75	800	0.10
YAW	65	55	0	100	1.00	0.70	667	0.10

ESC Check and Flash firmware


- Download New release BLHeliSuite from:
<https://www.mediafire.com/folder/dx6kfaasyo241/BLHeliSuite>
- Plug the usb and connect the flight controller to computer



- Open the Device Manager of your computer, find the Ports, please make sure the Com port Serial Number is under 255, otherwise it will can't connect to the BLHELISUITE. You can change the port serial number like the following step:

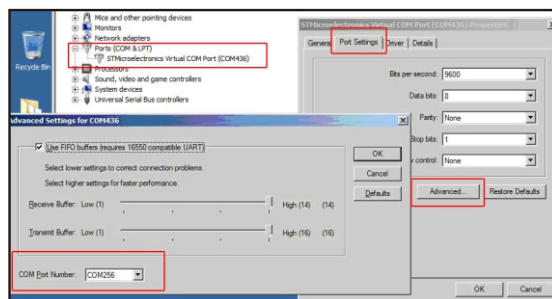

- Open the BLHELISUITE, Select SILABS BLHeli Bootloader (Cleanflight) from the third tab on the top side. Then Select the right Serial com port and Click connect. You can also Flash the new release BLHeli_s firmware via the BLHELISUITE, the firmware Target is "F-H-40"

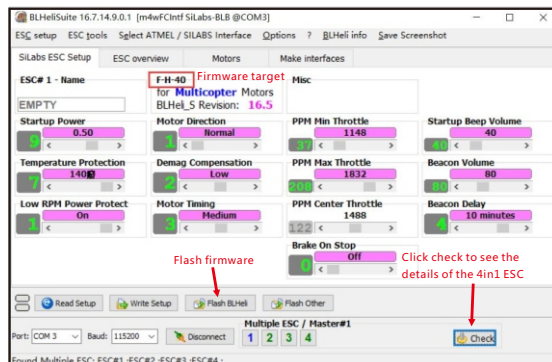

Flight controller firmware update

- Install latest STM32 Virtual COM Port Driver
<http://www.st.com/web/en/catalog/tools/PF257938>
- Install STM BOOTLOAD Driver (STM Device in DFU MODE)
- Open Betaflight configurator and choose firmware target "CrazybeeF4DX", then select the firmware version.
- There are 2 ways to get in DFU Mode: 1). solder the boot pad and then plug USB to computer 2). loading betaflight firmware and hit "flash", then it will getting into DFU Mode automatically.
- Open Zadig tools to replace the drivers from STM32 Bootloader to WINUSB Driver.
- Reconnect the flight controller to the computer after replace driver done, and open Betaflight Configurator, loading firmware and flash.

